

EXC MECHANICAL PULVERIZER ATTACHMENT

www.rockbreaker.com



MECHANICAL PULVERIZER

BTI LINE OF EXC MECHANICAL PULVERIZERS



MODEL	UNITS	EXC60CP	EXC80CP	EXC100CP
Weight	lb	4,816	5,116	5,226
	kg	2 185	2 321	2 370
Maximum Opening (A)	in	25.5	32.5	32.5
	mm	648	826	826
Jaw Depth (B)	in	28.5	32.0	32.5
	mm	724	813	826
Jaw Width (C)	in	32.5	35.0	37.0
	mm	825	889	940
Recommended Carrier Weight	lb	46,000 - 65,000	65,000 - 88,000	88,000 - 111,000
	tonne	20 - 30	30 - 40	40 - 50

FEATURES AND BENEFITS

- ⊕ Get maximum crushing power
- ⊕ Reduce downtime in the field with bolt-on replaceable teeth
- ⊕ Save maintenance costs with individual replaceable teeth
- ⊕ Outstanding penetration and fragmentation with the unique tooth design and arrangement
- ⊕ Superior strength with wear-resistance steel for long life and durability
- ⊕ Interchange between different carriers with pin and sleeve kits
- ⊕ Use your carrier's existing hydraulics without additional circuits
- ⊕ Optional extreme-duty kit

APPLICATIONS:

Secondary Concrete Demolition & Recycling

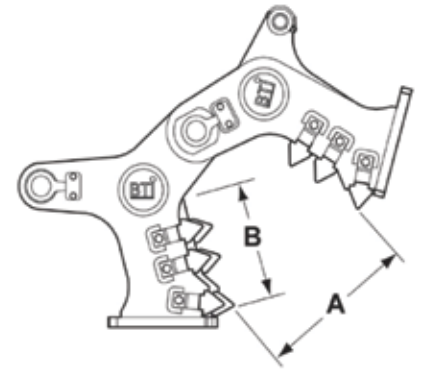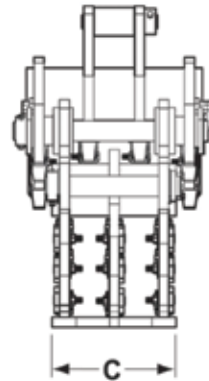

Breaker Technology Ltd.

35 Elgin Street North
Thornbury, Ontario
N0H 2P0 Canada
Phone: 519.599.2015
Fax: 519.599.6803

Breaker Technology Inc.

3453 Durahart Street
Riverside, California
92507 USA
Phone: 951.369.0878
Fax: 951.369.8281

Find us on



www.rockbreaker.com
20401-ENG-0520